

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 November 2005 (03.11.2005)

PCT

(10) International Publication Number
WO 2005/102613 A1

(51) International Patent Classification⁷: **B25C 5/16**

(21) International Application Number:
PCT/IT2004/000224

(22) International Filing Date: 20 April 2004 (20.04.2004)

(25) Filing Language: Italian

(26) Publication Language: English

(71) Applicant (for all designated States except US): **ROMEO
MAESTRI & FIGLI S.p.A.** [IT/IT]; Via Milano, 5,
I-20010 Comaredo (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **POZZATO, Giorgio**
[IT/IT]; Via degli Abeti 26, I-20077 Melegnano (IT).

(74) Agents: **PIZZOLI, Antonio et al.**; Società Italiana
Brevetti S.p.A., Via Carducci, 8, I-20123 Milano (IT).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: STAPLER WITH ADAPTER

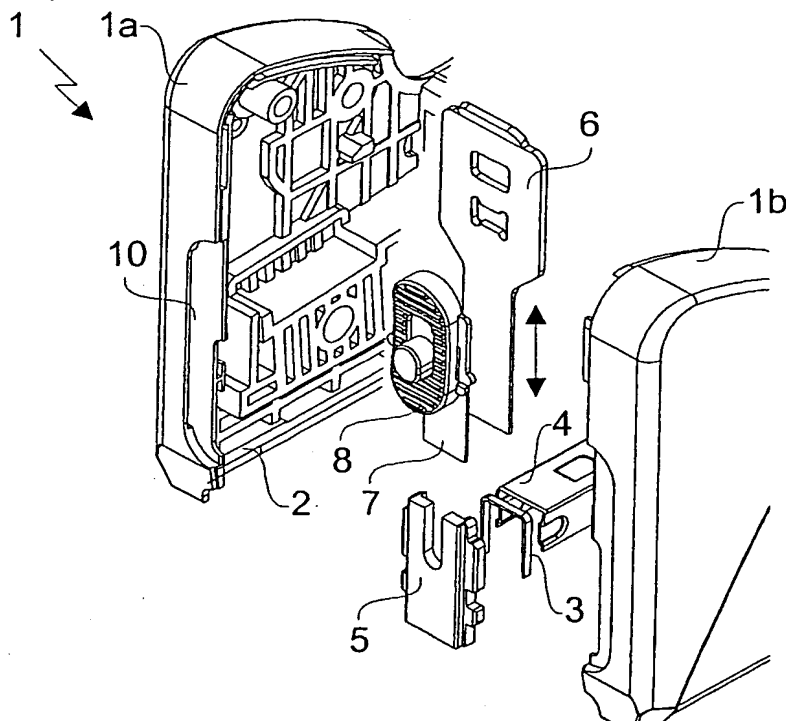

(57) Abstract: Stapler comprising a main body (1) which includes a seat (2) for a row of staples (3, 13) and/or nails (12, 14) which are urged by a pusher (4) towards an ejection head (5), wherein a striker (6) can run in a direction substantially perpendicular to the feed direction of the row of staples (3, 13) and/or nails (12, 14) in the seat (2) for pushing and ejecting from the ejection head (5) the first staple (3, 13) and/or nail (12, 14) of the row, wherein a mobile plate (7) is mechanically connected to a slider (8) which protrudes outside the main body (1) so that by moving the slider (8) the mobile plate (7) can slide in the main body (1) for being arranged between the ejection head (5) and the striker (6) when the latter pushes the first staple (3, 13) and/or nail (12, 14).

WO 2005/102613 A1